


12/24/2025 10:25:18 AM  
F:\24

1 FLOOR PLAN - AREA B  
1/8" = 1'-0"

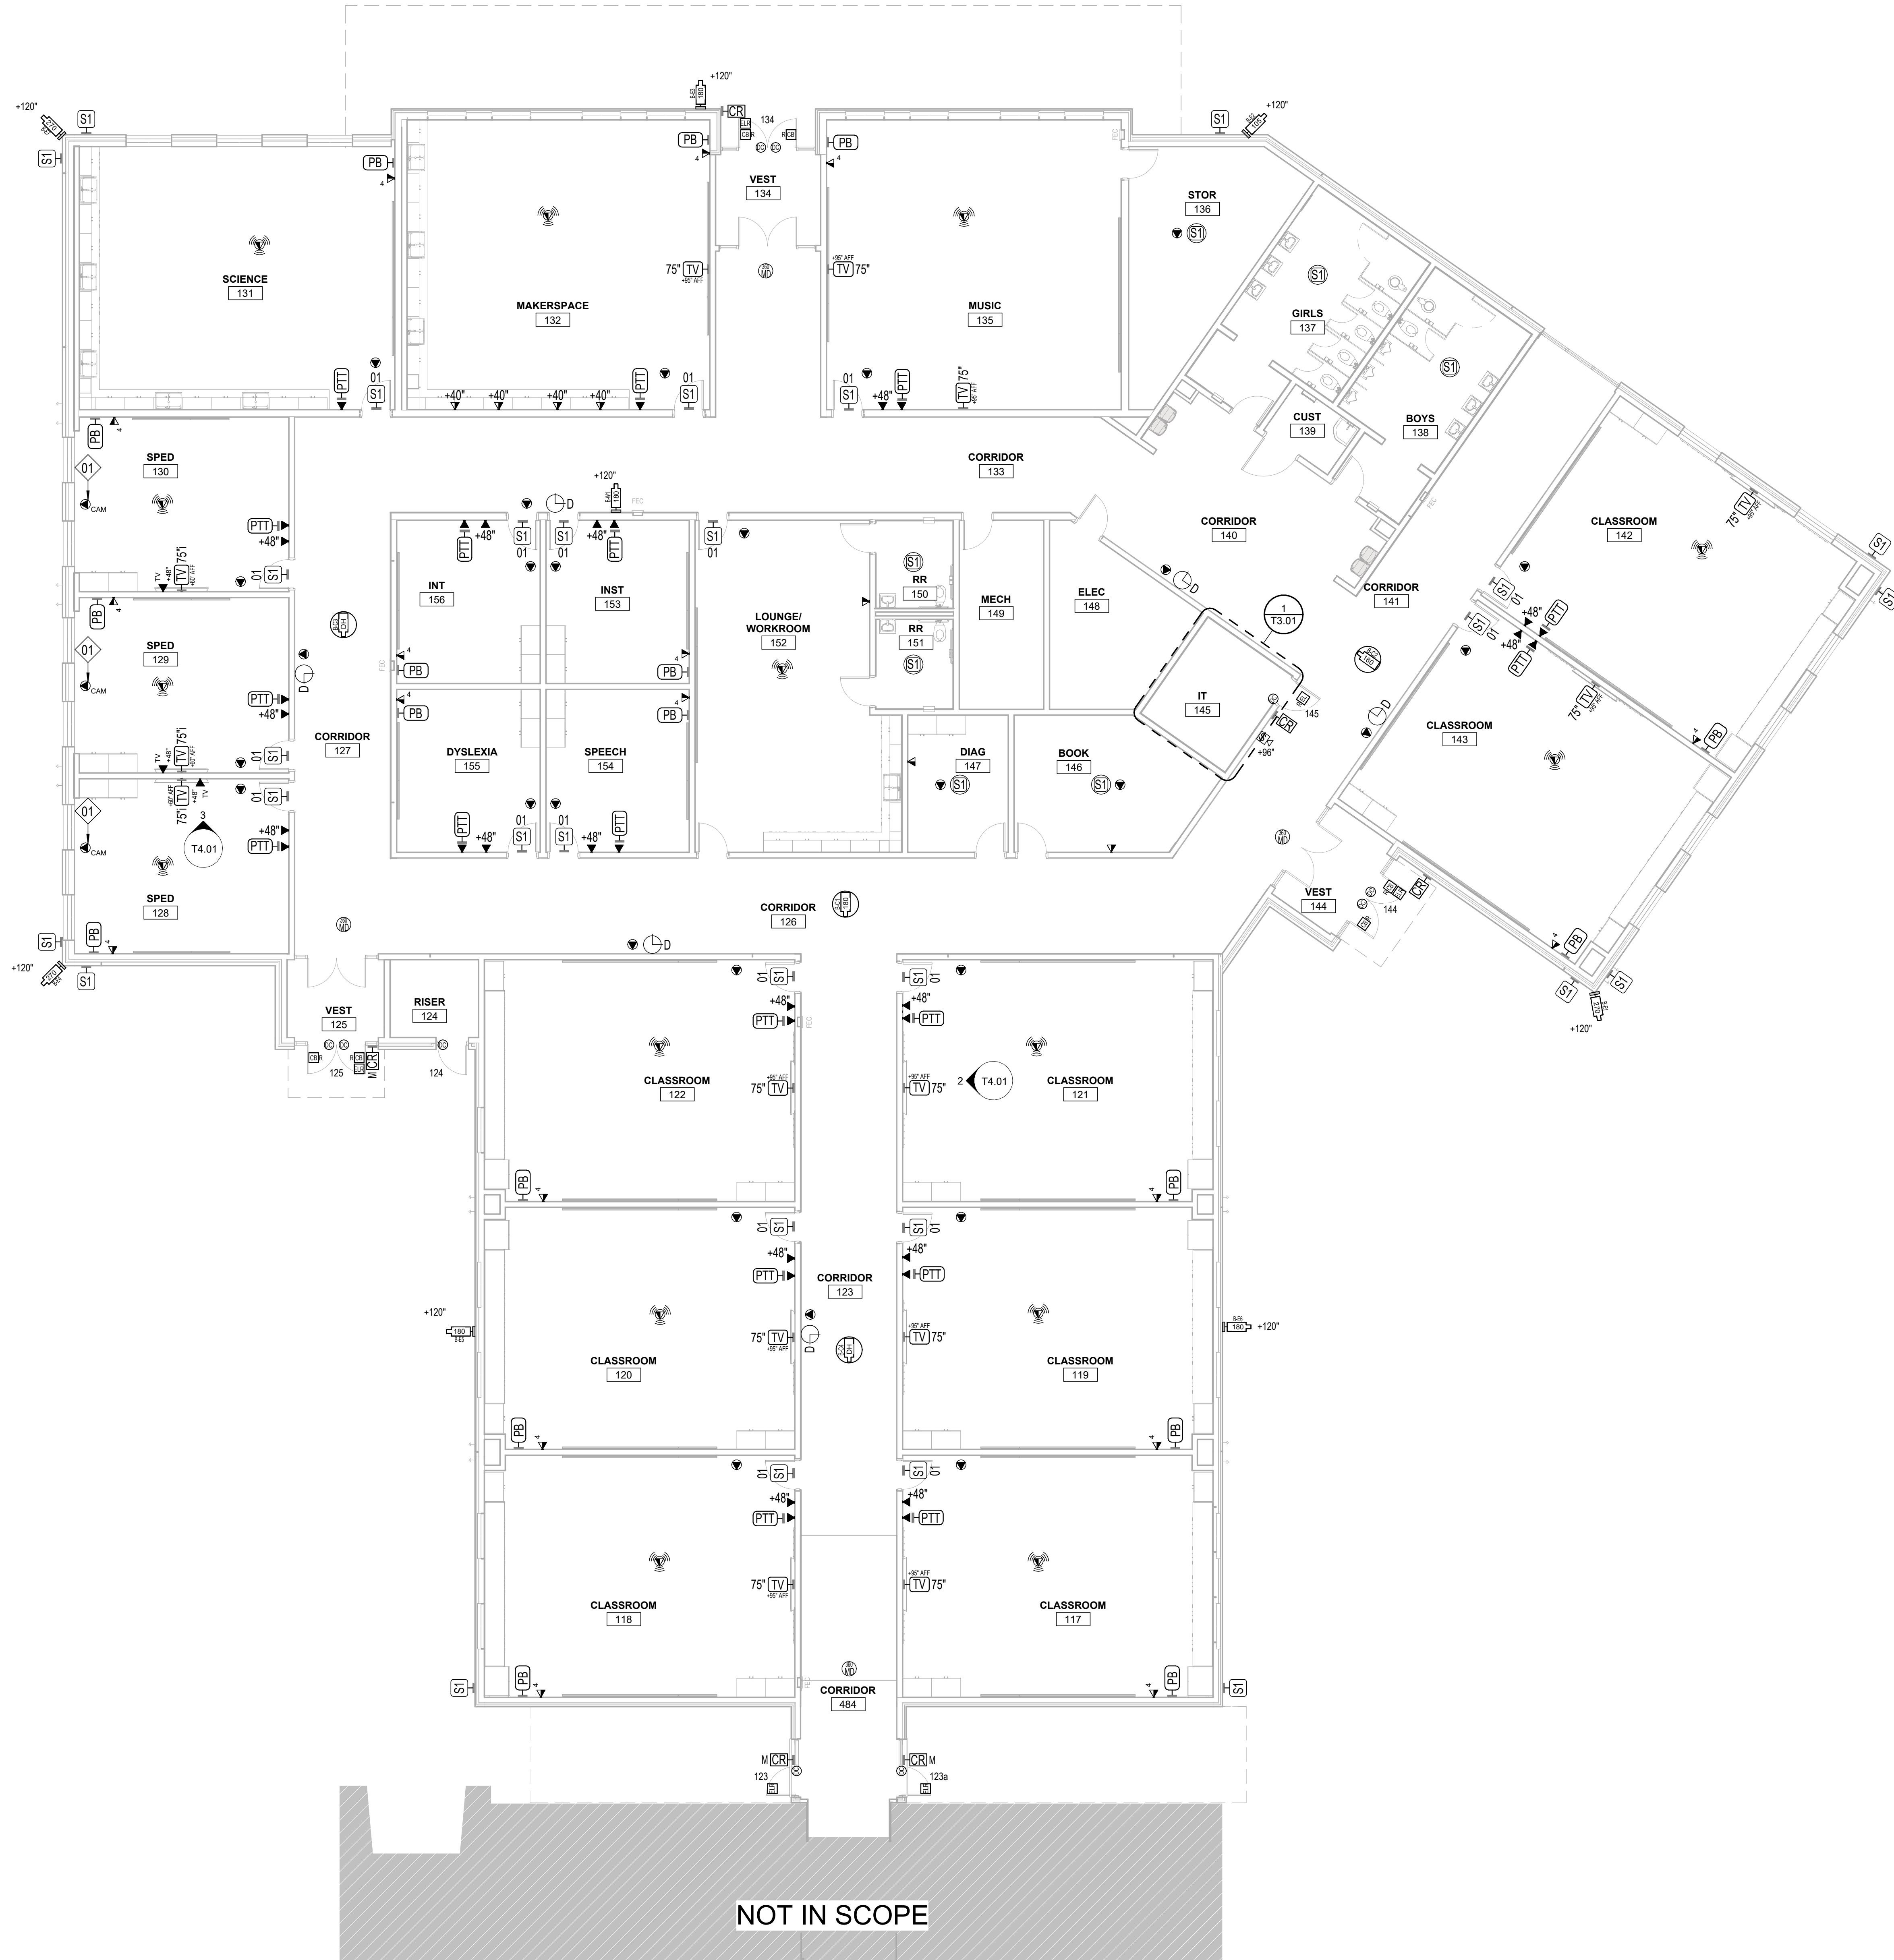

SHEET NOTES:

REFERENCE SHEET T0.01 FOR ALL SYMBOLS AND PROJECT SPECIFIC NOTES.

ALL CONDUITS SHALL BE 1" FOR ALL DEVICES UNLESS NOTED OTHERWISE ON THE TECHNOLOGY DRAWINGS.

TECHNOLOGY DEVICES SHOWN ON RCP SHEETS ARE FOR COODINATION PURPOSES AND CABLE PATHWAYS. REFERENCE FLOOR PLANS FOR ADDITIONAL INFORMATION.

KEYNOTE LEGEND

(NOT ALL KEYNOTES MAY APPLY)

01. ABOVE CEILING DATA RESERVED FOR FUTURE CAMERA IF REQUESTED. CONTRACTOR SHALL PROVIDE A 15' SERVICE LOOP NEATLY COILED AND SUPPORTED ABOVE CEILING. ALL FUTURE CABLES SHALL BE TERMINATED AND TESTED FOR RECORD AND WARRANTY PURPOSES, AND BE LABELED AT CEILING GRID.

Parkhill




12/08/2025  
Parkhill.com

McGill Elementary School Phase II  
San Angelo ISD



CLIENT  
San Angelo ISD  
201 Millspaugh St. San Angelo, Texas  
76901

PROJECT NO.  
45792.25  
KEY PLAN

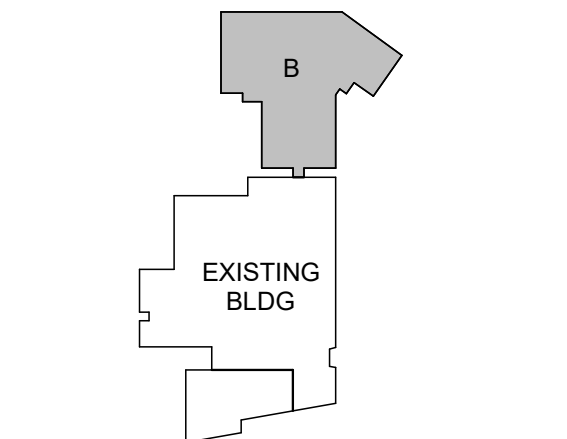

#	DATE	DESCRIPTION
1	12/08/2025	Bid Documents

FLOOR PLAN - AREA B  
T2.02